



DOUBLE DECK BANQUET BROILER

TITAN DOUBLE DECK BANQUET BROILER



JBB-236

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JBB-236	DOUBLE DECK INFRARED BROILER
<input type="checkbox"/> JBB-236 R	DOUBLE DECK RADIANT BROILER
<input type="checkbox"/> JBB-236 IR	DOUBLE DECK COMBINATION BROILER

STANDARD FEATURES

- Supplied with ceramic tile burners
- Eight 26,000 BTU/hr. infrared burners—four burners per deck
- High volume blower providing filtered primary air
- Easy clean washable removable filter
- Two—one per deck—large 2-piece lift out broiler grid (measuring 24-1/4" x 13-1/4" each)
- Grid carriage glides on roller bearing
- Large capacity drip tray—one per tray
- Stainless steel front, sides and top
- 14 gauge stainless steel all welded body construction
- 3/4" rear gas connection with regulator
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs

ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)


WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





DOUBLE DECK BANQUET BROILER

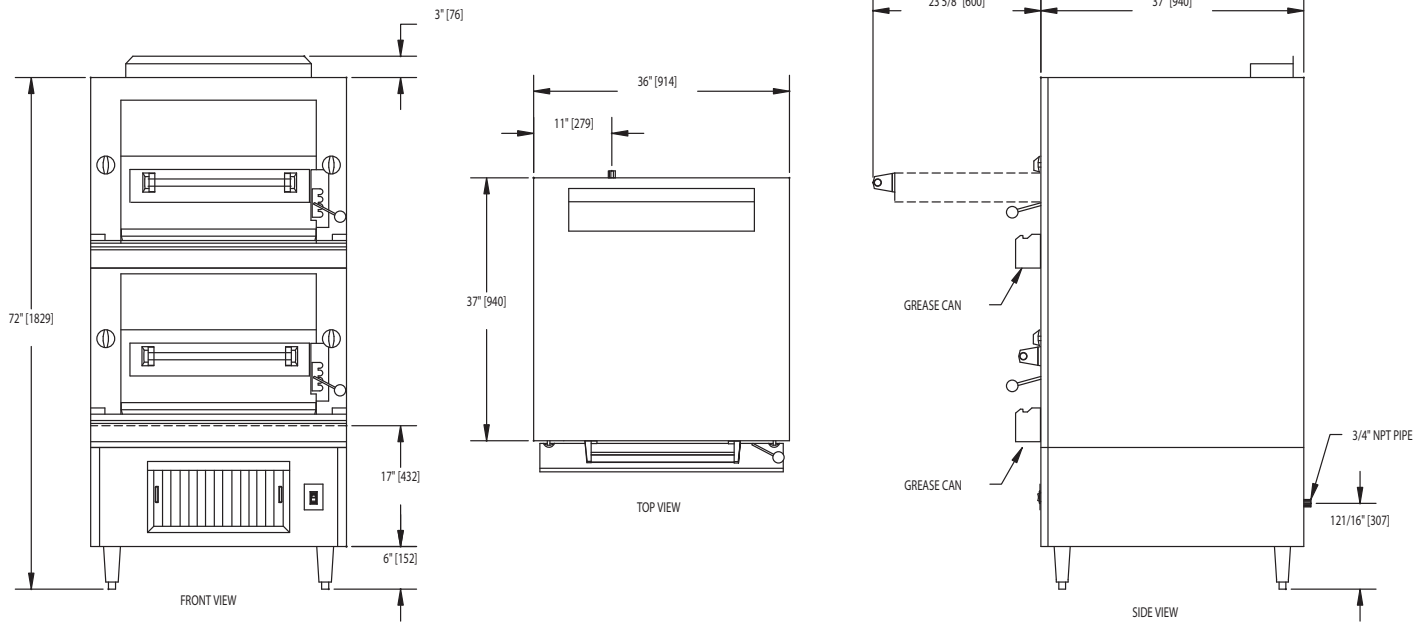

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JBB-236	208,000	36"	38-1/4"	69"	1000 LBS.
JBB-236 R	180,000	36"	38-1/4"	69"	1000 LBS.
JBB-236 IR	194,000	36"	38-1/4"	69"	1000 LBS.

ELECTRIC BROILER BLOWER ONLY:

- 6 foot cord with 3 prong plug
- 2.0 amp required

DESCRIPTION:

Heavy duty "Banquet" broiler. To be model #JBB-_____ manufactured by Jade Range. Provide eight 26,000 BTU/hr. infrared burners. To have two large (2 piece) lift-out broiler grids measuring 24-1/4" x 13-1/4" each—one set per deck. Furnish carriage complete with rolling bearings and multi-action handle. To have 14 gauge all welded body with stainless steel front and sides. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

UTILITY INFORMATION:

- 1" or 3/4" capped rear manifold connection. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)

- Required operating pressure:
 Natural Gas 5" W.C. minimum
 Propane Gas 10" W.C. minimum
 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.