




GRIDDLE MODULAR

Bistro

MODULAR BISTRO GRIDDLE

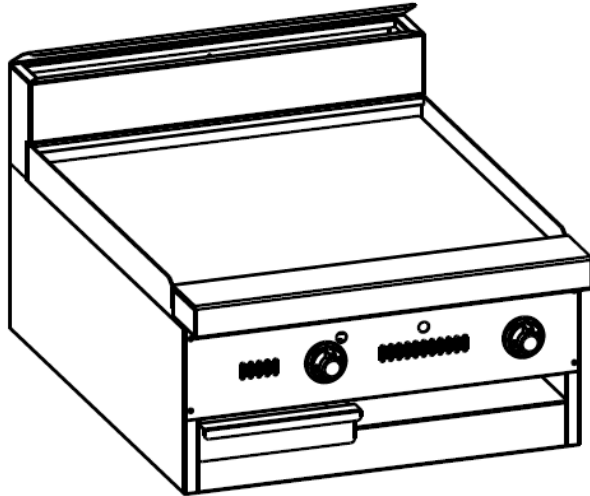

JBR-24G-M

| MODEL NO. | DESCRIPTION |
|------------------------------------|---------------------|
| <input type="checkbox"/> JBR-12G-M | 12" GRIDDLE MODULAR |
| <input type="checkbox"/> JBR-24G-M | 24" GRIDDLE MODULAR |
| <input type="checkbox"/> JBR-36G-M | 36" GRIDDLE MODULAR |
| <input type="checkbox"/> JBR-48G-M | 48" GRIDDLE MODULAR |
| <input type="checkbox"/> JBR-60G-M | 60" GRIDDLE MODULAR |
| <input type="checkbox"/> JBR-72G-M | 72" GRIDDLE MODULAR |

STANDARD FEATURES

- Heavy Duty Construction Welded stainless steel frame
- 1" polished steel Griddle plate
- Stainless steel pilot tips
- Stainless steel crumb tray
- Stainless steel burner box
- Stainless steel solid 4" plate shelf landing
- One 3/4" rear gas connection
- One 3/4" gas regulator
- Cast iron easy lift-off burner
- Stainless steel stub back 6" high
- Standard four year parts and labor warranty

DESCRIPTION:

Griddles are to have polished 1" steel plate with 24,000 BTU burner every 12". Unit to be provided with 3/4" gas regulator

BASE OPTIONS:

- Floor length legs
- Refrigerator base (remote or self-contained)
- Freezer base (remote or self-contained)

AVAILABLE OPTIONS

- "Thermostat" controls
- 36" flex hose with quick disconnect
- 48" flex hose with quick disconnect
- Additional oven rack (one supplied per oven)
- Stainless Steel 22" high riser or 22" single high shelf
- Stainless Steel 34" high riser or 34" double high shelf
- Casters 6" - with 5" wheel diameter
- Counter top legs - 4" tall

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 •
PHONE: 800-884-5233 • FAX: 714-961-2550

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA



Intertek
Comforms to
ANSI/NSF Std 4






GRIDDLE MODULAR

Bistro

MODULAR BISTRO GRIDDLE

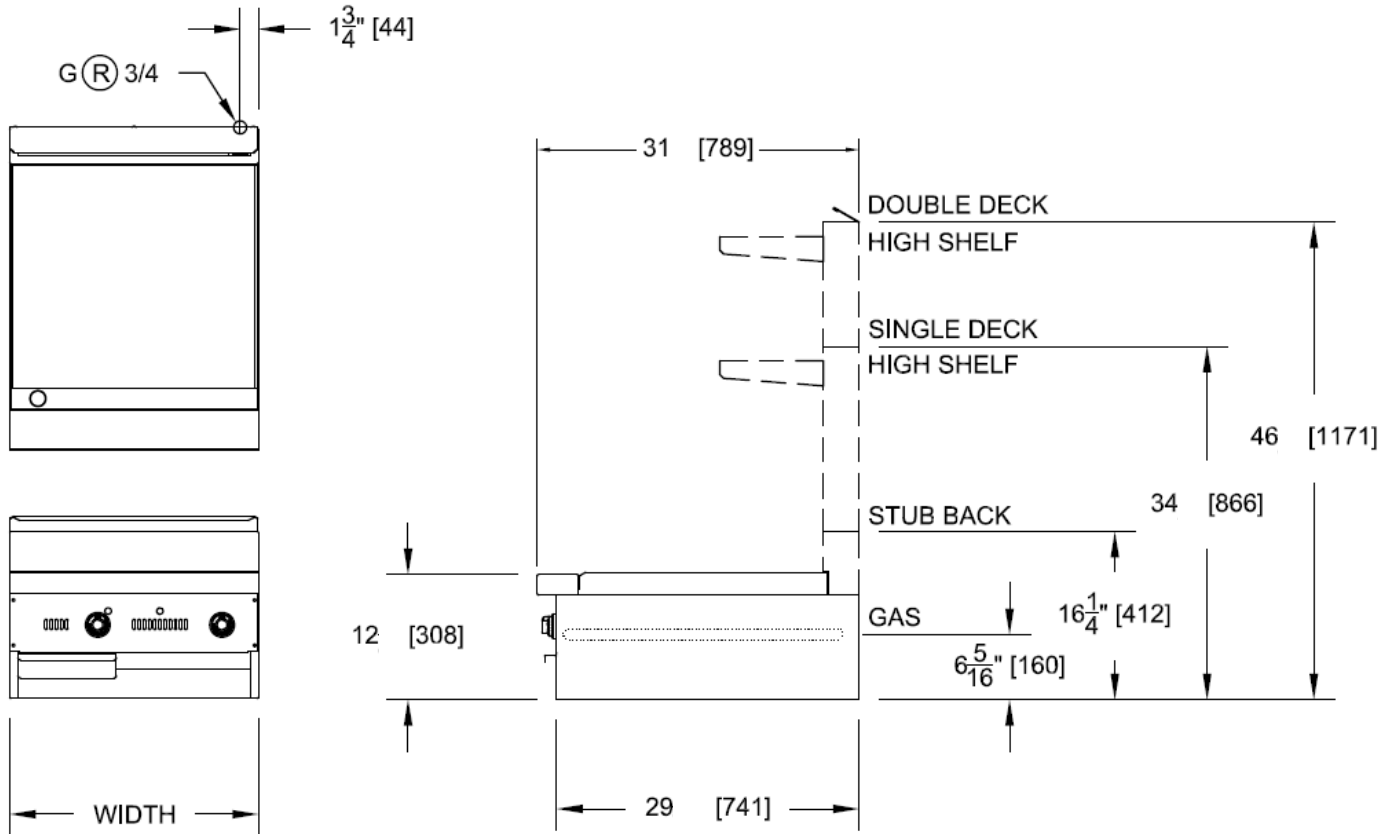

| MODEL | BTU'S | WIDTH | DEPTH | HEIGHT | APPX. SHP. WT |
|-----------|---------|-------|-------|--------|---------------|
| JBR-12G-M | 24,000 | 12" | 31" | 12" | 300 LBS. |
| JBR-24G-M | 48,000 | 24" | 31" | 12" | 300 LBS. |
| JBR-36G-M | 72,000 | 36" | 31" | 12" | 450 LBS. |
| JBR-48G-M | 96,000 | 48" | 31" | 12" | 600 LBS. |
| JBR-60G-M | 120,000 | 60" | 31" | 12" | 750 LBS. |
| JBR-72G-M | 144,000 | 72" | 31" | 12" | 900 LBS. |

Note: This unit must be connected with the gas appliance regulator supplied

UTILITY INFORMATION:

- 3/4" Connection - see drawing for location
- Required operating pressure:
Natural Gas: 5" W.C. minimum
Propane Gas: 5" W.C. minimum



Intertek
Comforms to
ANSI/NSF Std 4

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 •
PHONE: 800-884-5233 • FAX: 714-961-2550

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA

