



REMOTE REFRIGERATED BASES

REMOTE REFRIGERATED BASES



JRLH-02R-T-36 shown with JSB-36RM, JMRH-36GT, JMRH-36B

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JRLH-02R-T-36	36" 2 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JRLH-04R-T-54	54" 4 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JRLH-04R-T-66	66" 4 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JRLH-04R-T-72	72" 4 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JRLH-06R-T-84	84" 6 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JRLH-06R-T-96	114" 6 DRAWER REMOTE REFRIGERATOR UNIT
<input type="checkbox"/> JFLH-02R-T-36	36" 2 DRAWER REMOTE FREEZER UNIT
<input type="checkbox"/> JFLH-04R-T-54	54" 4 DRAWER REMOTE FREEZER UNIT
<input type="checkbox"/> JFLH-04R-T-66	66" 4 DRAWER REMOTE FREEZER UNIT
<input type="checkbox"/> JFLH-04R-T-72	72" 4 DRAWER REMOTE FREEZER UNIT

Note: If required size is not listed, see options for cabinet extensions. Bases must be ordered in conjunction with Titan™ modular range units only.

STANDARD FEATURES

- Cabinet interiors, front face and sides to be stainless steel
- Drawers and cabinet are 100% polyurethane "Shot-In-Place" foam insulated
- Drawer faces have flush mount pull handle. Face and back to be stainless steel
- Self closing drawers have 14 gauge stainless steel track, with 2" heavy duty skate wheel
- Heavy duty rubber drawer gaskets
- Drawers to be easily removable for cleaning
- Drawers to accommodate 6" deep 12" x 20" hotel pans
- Specially designed high density breaker strips installed during the foaming process, without any visible fasteners
- Face mounted dial thermometers
- Blower coil evaporator with R-404 expansion valve unless otherwise specified
- Internal conduit for single point electrical connection
- Sleeves for refrigeration and drain lines
- Stainless steel 6" adjustable legs

Note: Electrical junction box, refrigeration line stub out and drain line are all standard rear connections, consult factory if other locations are required.
*Remote units not available on coasters.

AVAILABLE OPTIONS

- Cabinet extensions available:
 - 6" stainless steel filler
 - 12" stainless steel cabinet
 - 18" stainless steel cabinet
- Padlock assemblies (padlocks not included)
- Condensate evaporator




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





REMOTE REFRIGERATED BASES

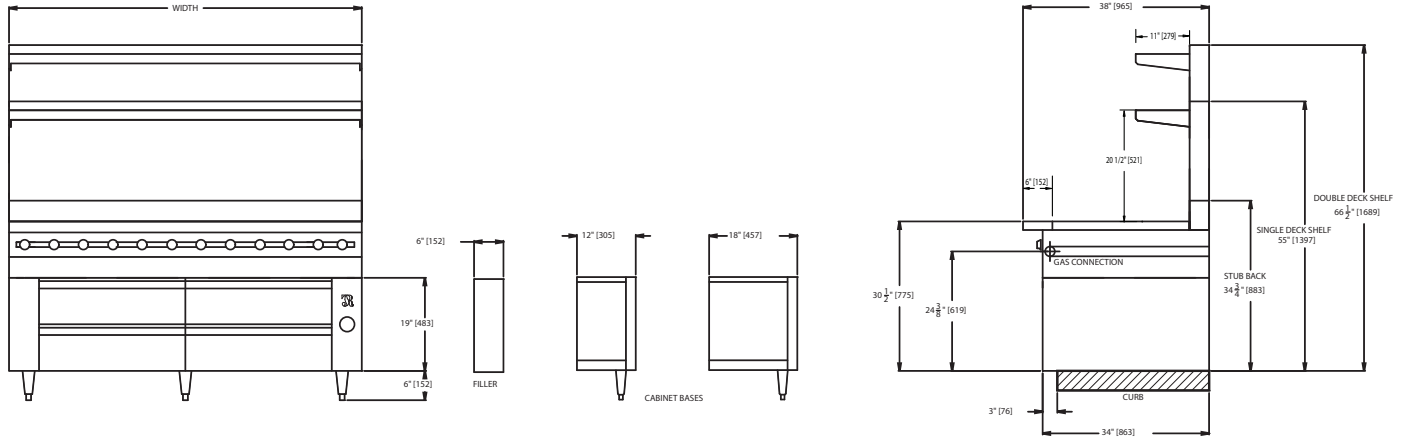

Note: If sauté station (JMSS models) mounted above, H.P. will be larger (consult factory).

MODEL	WIDTH	DEPTH	HEIGHT	DRAWERS 14-3/8"	DRAWERS 27-1/4"	PANS	BTUS**	AMPS	CUBIC FT.	APPX. SHP. WT.	SUGGESTED H.P.*
REMOTE REFRIGERATOR BASES											
JRLH-O2R-T-36	36"	34"	19-1/4"		2	4	2,600	1.45	7	275 LBS.	1/4
JRLH-O4R-T-54	54"	34"	19-1/4"	2	2	6	2,600	3.2	11	375 LBS.	1/4
JRLH-O4R-T-66	66"	34"	19-1/4"		4	8	2,900	3.2	14	425 LBS.	1/3
JRLH-O4R-T-72	72"	34"	19-1/4"		4	8	2,900	3.2	14	475 LBS.	1/3
JRLH-O6R-T-84	84"	34"	19-1/4"	2	4	10	2,900	3.2	18	575 LBS.	1/3
JRLH-O6R-T-96	96"	34"	19-1/4"		6	12	2,900	3.2	20	625 LBS.	1/3
REMOTE FREEZER BASES											
JFLH-O2R-T-36	36"	34"	19-1/4"		2	3	1,380	3.5	7	275 LBS.	1/4
JFLH-O4R-T-54	54"	34"	19-1/4"	2	2	5	1,800	4.4	11	375 LBS.	1/3
JFLH-O4R-T-66	66"	34"	19-1/4"		4	7	1,800	4.4	14	425 LBS.	1/3
JFLH-O4R-T-72	72"	34"	19-1/4"		4	7	1,800	4.4	14	475 LBS.	1/3

*For condensing unit (not to exceed 20 ft. run) **Based on 90°F ambient and 20°F evaporator

DESCRIPTION:

Low Height Remote refrigerated bases for exclusive use with Jade Range, LLC. Titan™ modular series units. To be Model # _____, manufactured by Jade Range, LLC. Cabinet interior, front, face, drawers and sides to be stainless steel. Drawers and cabinet to be 100% polyurethane "Shot-In-Place" foam insulated. Provide easily removable self closing drawers to accommodate 6" deep 12" x 20" hotel pans and 14 gauge stainless steel track, with 2" heavy duty skate wheels. Provide heavy duty rubber drawer gaskets, face

mounted dial thermometers, blower coil evaporator with R-404 expansion valve, internal conduit for single point electrical connection. Sleeves for refrigeration and drain lines. Supply stainless steel adjustable 6" legs.

UTILITY INFORMATION - ELECTRICAL:

- Standard: 115v/60/1 (for other electrical requirements consult factory)