

MODULAR HOT TOP RANGE



JMRH-2HT-A (shown without legs)

| MODEL NO. | DESCRIPTION | |
|--------------|----------------------------|--|
| ☐ JMRH-1HT-A | 12" ONE HOT TOP SECTION | |
| ☐ JMRH-1HT | 18" ONE HOT TOP SECTION | |
| ☐ JMRH-2HT-A | 24" TWO HOT TOP SECTIONS | |
| ☐ JMRH-2HT | 36" TWO HOT TOP SECTIONS | |
| ☐ JMRH-3HT | 36" THREE HOT TOP SECTIONS | |
| ☐ JMRH-4HT | 48" FOUR HOT TOP SECTIONS | |
| ☐ JMRH-5HT | 60" FIVE HOT TOP SECTIONS | |
| ☐ JMRH-6HT | 72" SIX HOT TOP SECTIONS | |

STANDARD FEATURES

- · Highly polished reinforced cast iron plates
- One 35,000 BTU/hr burner per section
- · Variable size multi-point gas connection—see utility information for details
- 14 gauge all welded body construction
- Stainless steel gas tubing throughout
- · Stainless steel front, sides and stub back
- · Stainless steel 6" plate shelf
- 3/4" gas regulator (shipped loose, must be installed for proper operation)

AVAILABLE OPTIONS

- ☐ Stainless steel high riser
- ☐ Stainless steel double high riser
- ☐ Stainless steel high shelf
- ☐ Stainless steel double high shelf
- $\hfill \square$ Stainless steel tubular high shelf
- ☐ Stainless steel tubular double high shelf
- ☐ Common plate shelf with Item(s) Model(s) _____
- ☐ Cap and cover manifold. Left ☐ Right ☐
- ☐ Floor length legs

ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)
- ☐ 36" flex hose with quick disconnect (3/4" connection)
- ☐ 48" flex hose with quick disconnect (3/4" connection)
- ☐ 1" gas pressure regulator (specify gas type)
- ☐ 1-1/4" gas pressure regulator (specify gas type)






WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA



MODULAR HOT TOP RANGE

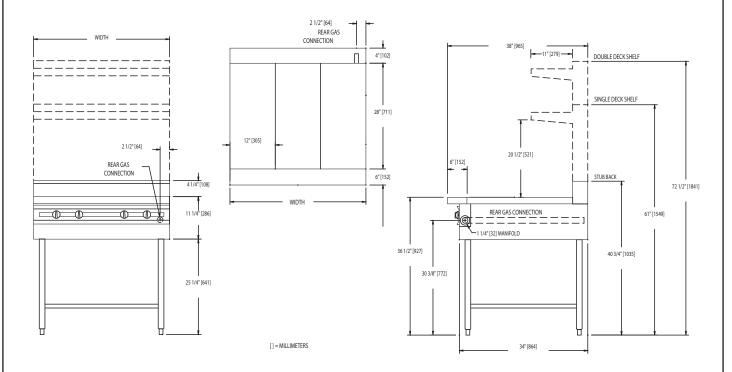

| MODEL | BTUS | WIDTH | DEPTH | HEIGHT | APPX. SHP. WT. |
|------------|---------|-------|-------|-------------|----------------|
| JMRH-1HT-A | 35,000 | 12" | 38" | SEE DRAWING | 130 LBS. |
| JMRH-1HT | 35,000 | 18" | 38" | SEE DRAWING | 210 LBS. |
| JMRH-2HT-A | 70,000 | 24" | 38" | SEE DRAWING | 205 LBS. |
| JMRH-2HT | 70,000 | 36" | 38" | SEE DRAWING | 400 LBS. |
| JMRH-3HT | 105,000 | 36" | 38" | SEE DRAWING | 410 LBS. |
| JMRH-4HT | 140,000 | 48" | 38" | SEE DRAWING | 540 LBS. |
| JMRH-5HT | 175,000 | 60" | 38" | SEE DRAWING | 615 LBS. |
| JMRH-6HT | 210,000 | 72" | 38" | SEE DRAWING | 690 LBS. |

DESCRIPTION:

Heavy duty modular hot top range. To be model #

JMRH ______ manufactured by Jade Range. Top sections to consist of highly polished reinforced cast iron plates. Provide with 35,000 BTU/hr. per burner section, controlled by infinite gas valves. To have 14 gauge all welded body with stainless steel front and sides. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

UTILITY INFORMATION (GAS):

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure: Natural Gas 5" W.C. minimum Propane Gas 10" W.C. minimum 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA

